




## HiTree® Pressure Tanks (FRP)

**Frotec®** FRP tanks are made of high quality composite materials HDPE liner, with blow molding technique, it provides continuous seamless inner liner shell.

Epoxy resin system and FRP filament winding outer shell, which reinforces the liner, and provides strong strength for high pressure application.

Operating Condition	Operating Pressure: 150 psi. Operating Temperature: 49
Test	250.000 times of cycle test from 10psi to 150 psi withstanding pressure.
Color	Natural.

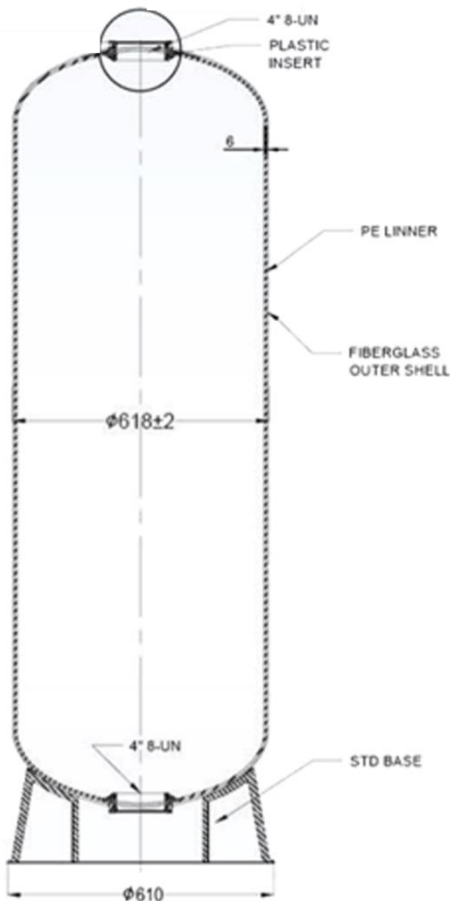



# HiTree® Pressure Tanks (FRP)

Model	Dia. X Height (Mm)	Top Open	Bottom Open	Mounting Mode	Liters
1013	255×340	2.5" NPSM	N/A	Top	13.10
1017	255×440	2.5" NPSM	N/A	Top	17.72
1024	255×635	2.5" NPSM	N/A	Top	25.80
1035	255×905	2.5" NPSM	N/A	Top	38.40
1044	255×1130	2.5" NPSM	N/A	Top	49.80
1054	255×1380	2.5" NPSM	N/A	Top	61.60
1248	300×1220	2.5" NPSM	N/A	Top	78.39
1252	300×1340	2.5" NPSM	N/A	Top	90.70
1354	335×1400	2.5" NPSM	N/A	Top	109.34
1465	355×1650	2.5" NPSM	N/A	Top	148.2
1665	405×1650	2.5" NPSM	N/A	Top	195.10
		4"UN	4"UN	Top / Side	203.1
1865	460×1650	2.5" NPSM	N/A	Top	248.04
		4"UN	4"UN	Top / Side	256.00
2069	510×1750	4"UN	N/A	Top / Side	295.55
2069	510×1900	4"UN	4"UN	Top / Side	301.20
2162	550×1750	4"UN	N/A	Top	315.77
2162	550×1900	4"UN	4"UN	Top / Side	323.10
2472	620×1900	4"UN	N/A	Top	467.04
2472	620×2200	4"UN	4"UN	Top / Side	470.10
3072	760×1900	4"UN	N/A	Top	715.20
3072	760×2100	4"UN	4"UN	Top / Side	718.10
3072	760×2210	6"Flange	6"Flange	Side	719.10
3672	910×1900	4"UN	N/A	Top	1012
3672	910×2200	4"UN	4"UN	Top / Side	1018
3672	910×2250	6"Flange	6"Flange	Side	1031
4272	1050×2250	6"Flange	6"Flange	Side	1465
4872	1250×2200	6"Flange	6"Flange	Side	1685
4886	1250×2400	6"Flange	6"Flange	Side	2487